


NORDIC DIMOUT - FS / FR


KM  
kinnamark









1006




1007




1008




1009



1010




1011



1012




1013




1014



1015



1016




1017



1018



1019




1020




1021




1022



1023



1024



1025


## NORDIC DIMOUT - FS / FR

|                                 |                                   |
|---------------------------------|-----------------------------------|
| <b>Art. nr.</b>                 | 101007                            |
| <b>Composition</b>              | 100% Polyester FR                 |
| <b>Width</b>                    | 300 cm                            |
| <b>Weight</b>                   | 335 gr./m <sup>2</sup>            |
| <b>Repeat (+/- 2%)</b>          | 0 cm                              |
| <b>Colorfastness to light</b>   | ≥ 5 SS EN ISO 105-B02 (Scale 1-8) |
| <b>Colorfastness to washing</b> | 5 SS EN ISO 105-C06 (Scale 1-5)   |


|                                      |                                                                                                                                                          |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Care Instruction</b>              |                                                                                                                                                          |
| <b>Shrinkage</b>                     | 1%                                                                                                                                                       |
| <b>Certificate</b>                   | Oeko -Tex Standard 100                                                                                                                                   |
| <b>Flame retardant according to:</b> | EN 13773:2003 Class 1                                                                                                                                    |
| <b>Aqoustics</b>                     | Measurement of sound absorption in a reverberation room:<br>EN ISO 354:2003. Ration of sound absorption EN ISO 11654:1997<br>$\alpha_w = 0,70$ / Class C |

OEKO-TEX®  
CONFIDENCE IN TEXTILES  
STANDARD 100







1026




1027




1028

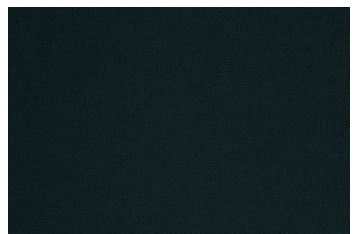

1001




1002



1003



1004

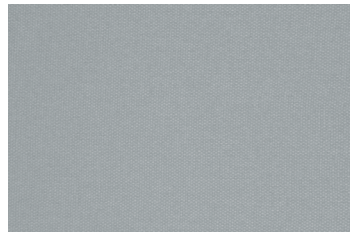

1005

## NORDIC DIMOUT - FS / FR

|                          |                                   |
|--------------------------|-----------------------------------|
| Art. nr.                 | 101007                            |
| Composition              | 100% Polyester FR                 |
| Width                    | 300 cm                            |
| Weight                   | 335 gr./m <sup>2</sup>            |
| Repeat (+/- 2%)          | 0 cm                              |
| Colorfastness to light   | ≥ 5 SS EN ISO 105-B02 (Scale 1-8) |
| Colorfastness to washing | 5 SS EN ISO 105-C06 (Scale 1-5)   |

|                               |                                                                                                                                                          |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Care Instruction              |                                                                     |
| Shrinkage                     | 1%                                                                                                                                                       |
| Certificate                   | Oeko -Tex Standard 100                                                                                                                                   |
| Flame retardant according to: | EN 13773:2003 Class 1                                                                                                                                    |
| Aqoustics                     | Measurement of sound absorption in a reverberation room:<br>EN ISO 354:2003. Ration of sound absorption EN ISO 11654:1997<br>$\alpha_w = 0,70$ / Class C |

OEKO-TEX®  
CONFIDENCE IN TEXTILES  
STANDARD 100 