

FLAME - FR

KM
kinnamark






FLAME - FR


| | |
|---------------------------------|-----------------------------------|
| Art. nr. | 101004 |
| Composition | 100% Polyester Trevira CS |
| Width | 300 cm, Leadband |
| Weight | 73 gr./m ² |
| Repeat (+/- 2%) | 0 cm |
| Colorfastness to light | ≥ 5 SS EN ISO 105-B02 (Scale 1-8) |
| Colorfastness to washing | 5 SS EN ISO 105-C06 (Scale 1-5) |

| | |
|--------------------------------------|---------------------------------------|
| Care Instruction | |
| Shrinkage | 1% |
| Certificate | Oeko -Tex Standard 100 |
| Flame retardant according to: | B1 DIN 4102 EN 13773 Class 1 M1 |


OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100



35




71




38




39




74




75




76

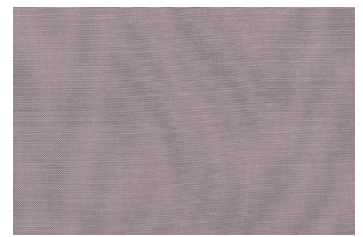


29




28




73



21

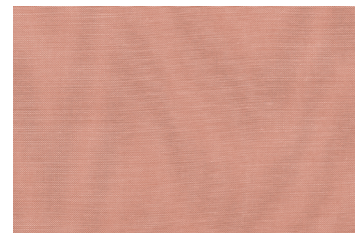

19



72



18



16



12




44



45



43

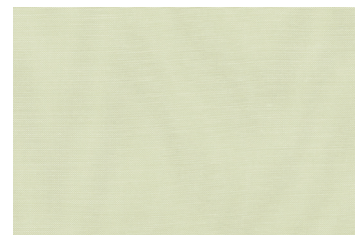

41

FLAME - FR

| | |
|---------------------------------|-----------------------------------|
| Art. nr. | 101004 |
| Composition | 100% Polyester Trevira CS |
| Width | 300 cm, Leadband |
| Weight | 73 gr./m ² |
| Repeat (+/- 2%) | 0 cm |
| Colorfastness to light | ≥ 5 SS EN ISO 105-B02 (Scale 1-8) |
| Colorfastness to washing | 5 SS EN ISO 105-C06 (Scale 1-5) |

| | |
|--------------------------------------|---------------------------------------|
| Care Instruction | |
| Shrinkage | 1% |
| Certificate | Oeko -Tex Standard 100 |
| Flame retardant according to: | B1 DIN 4102 EN 13773 Class 1 M1 |

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100



77




81




79




80



06



64



63



62



61




78



56



57



58



59

FLAME - FR

| | |
|---------------------------------|-----------------------------------|
| Art. nr. | 101004 |
| Composition | 100% Polyester Trevira CS |
| Width | 300 cm, Leadband |
| Weight | 73 gr./m ² |
| Repeat (+/- 2%) | 0 cm |
| Colorfastness to light | ≥ 5 SS EN ISO 105-B02 (Scale 1-8) |
| Colorfastness to washing | 5 SS EN ISO 105-C06 (Scale 1-5) |

| | |
|--------------------------------------|---------------------------------------|
| Care Instruction | |
| Shrinkage | 1% |
| Certificate | Oeko -Tex Standard 100 |
| Flame retardant according to: | B1 DIN 4102 EN 13773 Class 1 M1 |

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100