

FARO DIMOUT

KM  
kinnamark






01




02




03



04




05



06



07

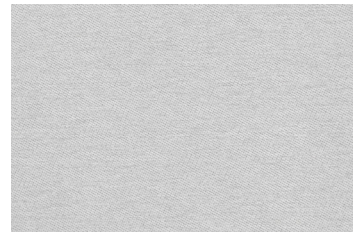

08



09



10



11



12



13



14




15



16




17



18



23

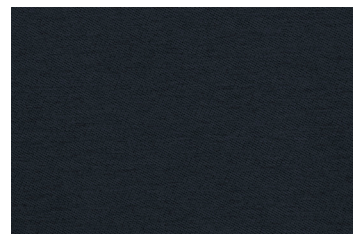

35

## FARO DIMOUT (recycled)

<b>Art. nr.</b>	101106
<b>Composition</b>	24% recycled Pes. / 76% Pes.
<b>Width</b>	300 cm
<b>Weight</b>	340 gr./m <sup>2</sup>
<b>Repeat (+/- 2%)</b>	0 cm
<b>Colorfastness to light</b>	≥ 5 SS EN ISO 105-B02 (Scale 1-8)
<b>Colorfastness to washing</b>	5 SS EN ISO 105-C06 (Scale 1-5)

<b>Care Instruction</b>	
<b>Shrinkage</b>	1%
<b>Certificate</b>	Oeko -Tex Standard 100
<b>Aqoustics</b>	Measurement of sound absorption in a reverberation room: EN ISO 354:2003. Ration of sound absorption EN ISO 11654:1997 $\alpha_w = 0,75$ / Class B

OEKO-TEX®  
CONFIDENCE IN TEXTILES  
STANDARD 100



36



44



45

## FARO DIMOUT (recycled)

<b>Art. nr.</b>	101106	<b>Care Instruction</b>	
<b>Composition</b>	24% Recycled Pes. / 76% Pes.	<b>Shrinkage</b>	1%
<b>Width</b>	300 cm	<b>Certificate</b>	Oeko -Tex Standard 100
<b>Weight</b>	340 gr./m <sup>2</sup>	<b>Aqoustics</b>	Measurement of sound absorption in a reverberation room: EN ISO 354:2003. Ration of sound absorption EN ISO 11654:1997 $\alpha_w = 0,75$ / Class C
<b>Repeat (+/- 2%)</b>	0 cm		
<b>Colorfastness to light</b>	≥ 5 SS EN ISO 105-B02 (Scale 1-8)		
<b>Colorfastness to washing</b>	5 SS EN ISO 105-C06 (Scale 1-5)		

