



SHADOW DIMOUT - FR

KM
Kinnamark







9800




9600




381

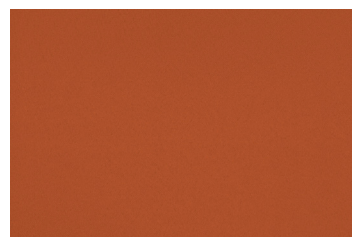


9113




340



9140



352

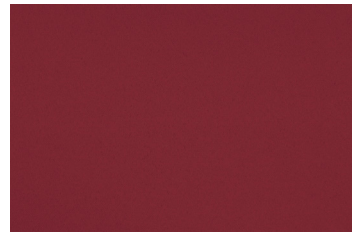


9530




9520



353



356

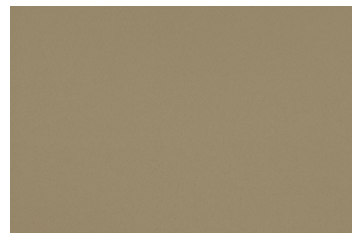

9810




382




9090




330

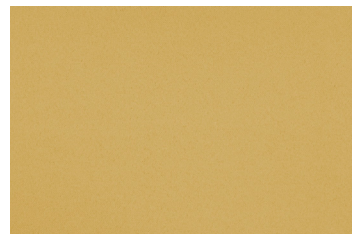


312



313



309



308




315

SHADOW DIMOUT - FR

Art. nr.	101015
Composition	100% Polyester FR
Width	300 cm
Weight	260 gr./m ²
Repeat (+/- 2%)	0 cm
Colorfastness to light	≥ 5 SS EN ISO 105-B02 (Scale 1-8)
Colorfastness to washing	5 SS EN ISO 105-C06 (Scale 1-5)

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 

Care Instruction	
Shrinkage	1%
Certificate	Oeko -Tex Standard 100
Flame retardant according to:	DIN 4102-B1 EN 13773 Class 1 M1 BS 5867 IMO
Acoustics	Measurement of sound absorption in a reverberation room: EN ISO 354:2003. Ration of sound absorption EN ISO 11654:1997 $\alpha_w = 0,85$ / Class B



317




314



370




322




318




9620




9001

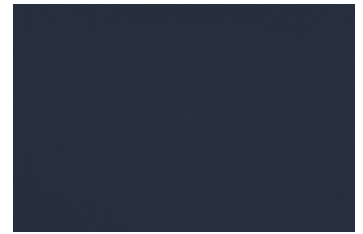


321



319




9397



9577



302



301




9950




335




9580




9585



379



9780

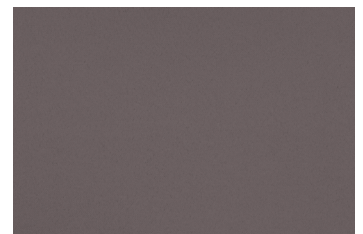


9550

SHADOW DIMOUT - FR


Art. nr.	101015
Composition	100% Polyester FR
Width	300 cm
Weight	260 gr./m ²
Repeat (+/- 2%)	0 cm
Colorfastness to light	≥ 5 SS EN ISO 105-B02 (Scale 1-8)
Colorfastness to washing	5 SS EN ISO 105-C06 (Scale 1-5)

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 


Care Instruction	
Shrinkage	1%
Certificate	Oeko -Tex Standard 100
Flame retardant according to:	DIN 4102-B1 EN 13773 Class 1 M1 BS 5867 IMO
Aquoustics	Measurement of sound absorption in a reverberation room: EN ISO 354:2003. Ration of sound absorption EN ISO 11654:1997 $\alpha_w = 0,85$ / Class B



380



378



9589




354

SHADOW DIMOUT - FR

Art. nr.	101015
Composition	100% Polyester FR
Width	300 cm
Weight	260 gr./m ²
Repeat (+/- 2%)	0 cm
Colorfastness to light	≥ 5 SS EN ISO 105-B02 (Scale 1-8)
Colorfastness to washing	5 SS EN ISO 105-C06 (Scale 1-5)

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 

Care Instruction	
Shrinkage	1%
Certificate	Oeko -Tex Standard 100
Flame retardant according to:	DIN 4102-B1 EN 13773 Class 1 M1 BS 5867 IMO
Aqoustics	Measurement of sound absorption in a reverberation room: EN ISO 354:2003. Ration of sound absorption EN ISO 11654:1997 $\alpha_w = 0,85$ / Class C